




## **DECOR SERIES - Cassette**

**Air Conditioner Model : CSV/AFV**

Cassette type distributed airflow all directions, including 4 colors can be matched with your styles.


DECOR SERIES

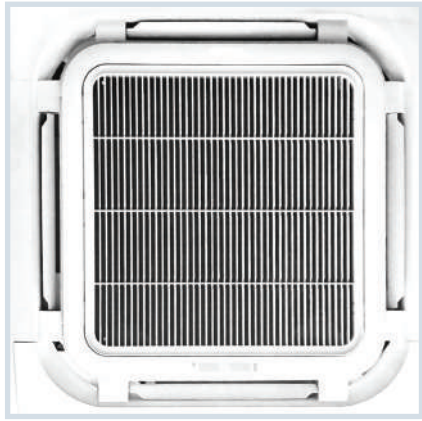

**Decor-Vanilla milk-White**  
standard



**Decor-Chacoal - Black**  
Options

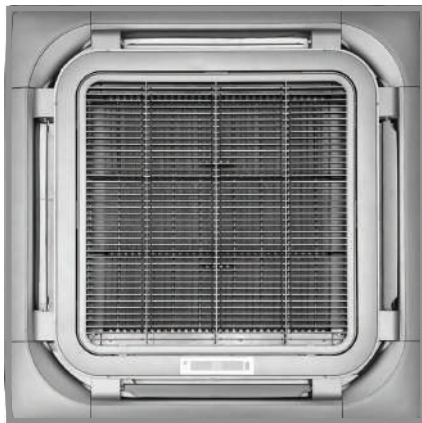


**Decor-Smoky - Grey**  
Options




**Decor-Cappuccino - Brown**  
Options



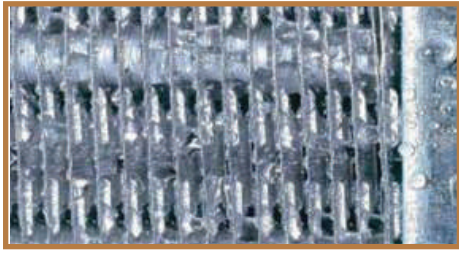

Normal aluminium fins collect dust between fin gaps, suitable for mold to grow, difficult to clean, prone to corrosion, high maintenance cost

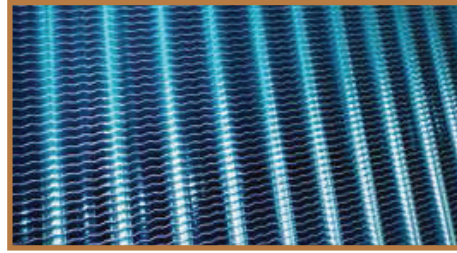

**Hydrophilic Coil** Blue fin coated evaporator coil provides hydrophobic property for bad odor and mold reducing. Energy saving and last longer than normal fins.


ways to clean and maintenance



**Built-in high head drain pump**

Standard built-in drain pumps with head height up to 700 mm, creating a ideal solution for water drainage.

**Remove and install air filter screen**




**Push-open grill & easy cleaning of filter**

The air intake grill can be easily disassembled by just push-open action, and can be still attached to the unit by 90 degree rotate angle, designed for easy maintenance and filter cleaning.



**New model design**

The newly designed cassette type, featured with round flow air-out directions, deliver you more comfortable feeling of air

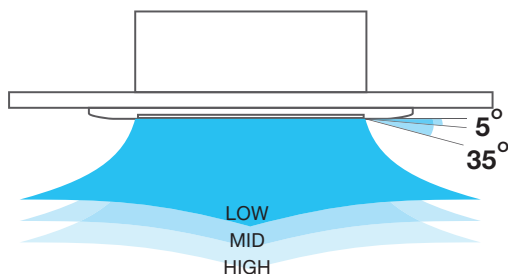

**Different swing angle design**

Differential swing angles to ensure comfortable feeling in anytime and anywhere.

## Condensing Unit Model : AFV

Casing made from high - quality metal sheet, coated with anti - oxidation white powder coated. Durable with great heat transferred performance from advanced aerodynamic fan design. Compact size, easy installation in small space.



With International standard quality guaranteed by customers over 70 countries

### SPECIFICATION MODEL : CSV / AFV

Nominal Cooling Capacity (BTU/Hr)	18,100	24,900	30,260	36,292	40,150	31,700	36,044	40,010	48,200	
SEER (BTU/Hr / Watt)	13.55	13.53	12.70	12.84	12.74	13.29	12.94	12.81	11.47	
COP (Watt / Watt)	3.74	3.73	3.51	3.45	3.517	3.668	3.47	3.536	3.17	
Power Consumption (Watt)	1,411	1,951	2,530	3,001	3,345	2,532	2,958	3,323	4,421	
Rated Operation Current (Amp.)	6.57	9.00	11.91	14.23	15.48	4.75	5.37	5.92	8.04	
Power Supply (Volt/Phase/Hz)	220/1/50					380/3/50				
EGAT CERTIFIED No.5 (มาตรฐาน เบอร์ 5)										
TIS Standard (มาตรฐาน มอก. 2134-2553)									-	
TIS Standard (มาตรฐาน มอก. 1529-2561)										
Fan Coil Unit	Model	CSV-18F	CSV-25F	CSV-30F	CSV-36F	CSV-40F1	CSV-30F	CSV-36F	CSV-40F1	CSV-50F
	Type	4-Way Cassette Type								
Rated Air Flow at High Speed (CFM)	600	800	1,000	1,200	1,400	1,000	1,200	1,400	1,600	
Fan Type	Multi Blade Centrifugal Type									
Evaporator Coil Type	Aluminium Louver Fin (Hydrophilic Coated) with Inner Grooved Copper Tube									
Expansion Device Type	Capillary Tube									
Control Type	Wireless Remote Control									
Air Filter Type	Washable PP. Net									
Drain Connection (Inch)(OD)	3/4									
Body Dimension (W x L x H) (mm.)	830 x 830 x 230			830 x 830 x 290						
Body Weight (kgs.)	37		50	51		50	51		53	
Panel Dimension (W x L x H) (mm.)	950 x 950 x 40									
Panel Weight (kgs.)	7									
Sound Pressure Level (H/M/L)(dB(A))	48/46/42	50/48/44	48/46/42	52/48/45	52/48/45	48/46/42	52/48/45	52/48/45	56/54/52	
Condensing Unit	Model	AFV-18FBS	AFV-25FL	AFV-301FBS	AFV-361FBS	AFV-401FBS	AFV-303FBS	AFV-363FBS	AFV-403FBS	AFV-503FXS
	Type	Horizontal Air Flow								
Fan Type	Propeller Fan									
Condenser Coil Type	Aluminium Louver Fin with Inner Grooved Copper Tube									
Compressor Type	Rotary								Scroll	
Refrigerant Type	R-32 (Fully Charge)								R-32(Holding Charge)	
Pipe Connection	Suction Line (Inch)(OD)	5/8			3/4					
	Liquid Line (Inch)(OD)	3/8				1/2	3/8		1/2	
Dimension (W x D x H) (mm.)	804x330x530	944x330x632	944x380x784		944x380x1,140	944x380x784	944x380x936	944x380x1,140		
Weight (kgs.)	52	61	66	72	89	66	71	88	92	
Sound Pressure Level (dB(A))	56	58	62		61	62		61	65	

Cooling capacity based on 27 °C DB. 19 °C WB air on evaporator coil and 35 °C DB air on condenser.

Specifications are subjected to change without notice for future improvement.



ISO 9001  
ISO 14001  
ISO 45001  
ISO 14064-1



TIS.2134  
TIS.1529



**UNI-AIRE CORPORATION CO., LTD.**

69 Moo 3 Kingkeaw Rd., Rachatewa District, Bangplee, Samutprakarn 10540 Thailand

Tel : +662-312-4500, Website : www.uni-aire.com

Export Sale : export@uni-aire.com

Domestic Sale : localsale@uni-aire.com

