



Air Conditioner Model : UFV/AFV

Fill up room space quickly with cool air from auto swing fan blade in vertical and horizontal directions. Easy installation, either hang on the roof or sit on the floor. Let your business runs smoothly.

New Environmental-friendly R32 refrigerant



- Enhanced cooling capacity
- Fast cooling
- Higher energy saving

- New 2017 EGAT's Label No.5 standard
- Zero Ozone Depletion Potential (ODP)
- 3 times lower Global Warming Potential (GWP) than R22


Fan coil unit Model : UFV

Durable material

casing made from high - quality metal sheet, coated with anti - oxidation white powder coated

Large Dust Filters

Reduce large dust particles from room environment, easy to clean with warm water

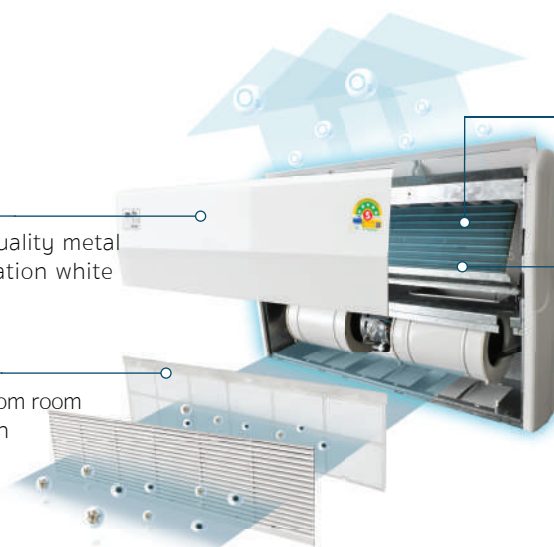


Copper tube

Inner Groove Copper Tube increase heat exchanger surface

Hydrophilic Coil

Blue fin coated evaporator coil provides hydrophobic property for bad odor and mold reducing. Energy saving and last longer than normal fins.

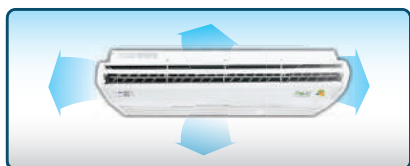

4 Directional auto-swing air louver



Deliver cool air in wide area including area below the unit



Ceiling Mounted



Floor Mounted

Available in floor mounted and ceiling mounted in one unit



4 Speed Motor

4 speeds adjustable wind blow Turbo-High-Medium-Low For Turbo cool or Quiet cool.



Turbo Fan

Powerful turbo motor delivers coolness to the room quickly yet quietly.

Other features



Auto Restart

Air conditioning system turns on automatically after electricity supply returns from a power failure. the system also memorizes every setting before the outage.



3 Minute Time Delay
































Prevent damage to the compressor from voltage sag or power failure.

Condensing Unit Model : AFV

Casing made from high - quality metal sheet, coated with anti - oxidation white powder coated. Durable with great heat transferred performance from advanced aerodynamic fan design. Compact size, easy installation in small space.



**With International standard quality
guaranteed by customers over 70 countries**

SPECIFICATION MODEL : UFV / AFV												
Nominal Cooling Capacity (BTU/hr)		13,800	18,141	25,112	30,000	36,178	40,589	30,055	36,391	40,079	50,180	60,010
EER (BTU/Watt)		13.28	13.39	13.38	12.59	12.76	12.62	13.03	12.73	12.66	11.50	11.21
COP (Watt / Watt)		3.66	3.56	3.60	3.47	3.48	3.44	3.5	3.43	3.44	3.173	3.093
Power Consumption (Watt)		1,101	1,489	1,978	2,531	3,004	3,406	2,445	3,031	3,362	4,635	5,686
Rated Operation Current (Amp)		5.08	6.82	9.28	11.91	14.42	15.83	4.74	5.55	6.03	8.37	10.03
Power Supply (Volt/Phase/Hz)		220/1/50						380/3/50				
EUAT CERTIFIED No.3 (มาตรฐาน มอก. 5)												
TIS Standard (มาตรฐาน มอก. 2134-2553)											-	-
TIS Standard (มาตรฐาน มอก. 1529-2561)												
Fan Coil Unit	Model : UFV	13FS1	18FS	25FS	30F1	36FS	40FS	30F	36FS	40FS	50F	60F
	Type	Floor & Ceiling Type										
Rated Air Flow at High Speed (CFM)		450	600	800	1,000	1,200	1,400	1,000	1,200	1,400	1,600	2,000
Fan Type		Multi Blade Centrifugal Type										
Evaporator Coil Type		Aluminium Louver Fin (Hydrophilic Coated) with Inner Grooved Copper Tube										
Distribution Coil Type		Capillary Tube										
Control Type		Wired Digital or Wireless Remote Control										
Air Filter Type		Washable PP. Net										
Drain Connection (Inch)(OD)		3/4										
Dimension (W x D x H) (mm.)		978x243x620		1,278x243x620		1,578x273x620		1,278x243x620	1,578x273x620		1,878x273x620	
Weight (kgs.)		35	36	47	50	64	68	50	64	66	68	80
Sound Pressure Level (T/H/M/L) (dB(A))		48/47/45/42	51/48/44/40	48/45/43/41	51/47/42/38	54/48/43/39	56/54/46/40	51/47/42/38	54/48/43/39	56/54/46/40	64/60/53/49	66/61/54/50
Condensing Unit	Model : AFV	13FBS	18FBS	25FL	301FBS	361FBS	401FBS	303FBS	363FBS	403FBS	503FXS	603FXS
	Horizontal Air Flow											
Fan Type		Propeller Fan										
Cor. Coil Type		Aluminium Louver Fin with Inner Grooved Copper Tube										
Compressor Type		Rotary										Scroll
Refrigerant Type		R-32 (Fully Charge)										
Pipe Connection	Suction Line (Inch)(OD)	1/2	5/8						3/4			
	Liquid Line (Inch)(OD)	3/8					1/2		3/8		1/2	
Dimension (W x D x H) (mm.)		804x330x530		944x330x632		944x380x784		944x380x936	944x380x1,140	944x380x784	944x380x936	944x380x1,140
Weight (kgs.)		40	52	61	66	72	89	66	71	88	92	
Sound Pressure Level (dB(A))		53.3	57.3	59.3	57.5	60.1	59.5	57.5	60.1	59.5	63	65

Cooling capacity based on 27 °C DB, 19 °C WB air on evaporator coil and 35 °C DB air on condenser.
Specifications are subjected to change without notice for future improvement.

**Eurovent certified for model DAHH only.



UNIAIRE CORPORATION CO., LTD.

69 Moo 3 Kingkeaw Rd., Rachatewa District, Bangplee,
Samutprakarn 10540 Thailand

Email:localsale@uni-aire.com | Email:export@uni-aire.com

Tel.+662-312-4500, www.uni-aire.com

@uni-aire Uni-Aire WhatsApp.+666-2312-3069

Thermostat

standard equipment

Digital wired thermostat

Modern-designed, easy-to-use digital wired thermostat with LCD display. Can be used as a control signal receiver from wireless remote controller

optional

Wireless digital thermostat



4 Speed Motor

4 speeds adjustable wind blow
Turbo - High - Medium - Low
For Turbo cool or Quiet cool.



ECO Mode

Power saving by automatically
setting temperature at 25 °C



Turbo Fan

Powerful turbo motor delivers
coolness to the room
quickly yet quietly.



Timer On / Off

24-hour timer for turning on or
turning off the air conditioning
system




Sleep Mode

Adjust suitable temperature for
sleeping time



4 Directional airflow


Intelligent airflow system. Auto swing
louver for a better air flow, both vertical
and horizontal directions.

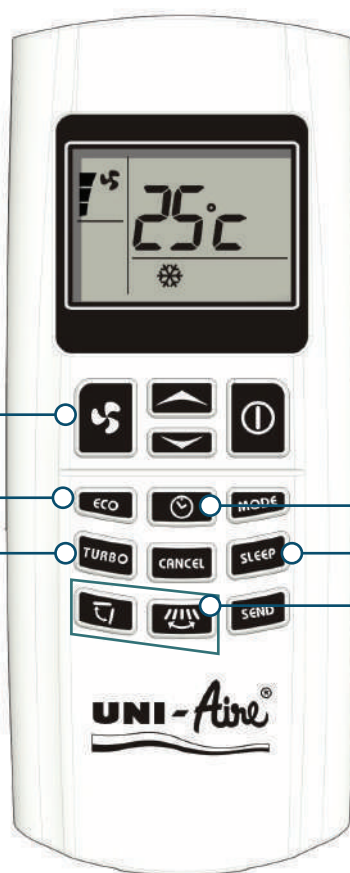

optional

Wired digital remote controller WIFI


With WIFI controller, multiple units in a same or different area can be
operated from anywhere through internet connection



Residence



Hotel



Office



Other places

