

MODEL TACU-CHB (Semi Hermatic Compressor)



PACKAGED AIR-COOLED CHILLER

15.83 – 30 TR



64.5 – 122.8 kW



MODEL : TACU-CHB-020,025,030

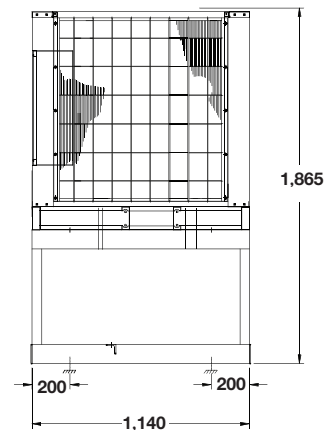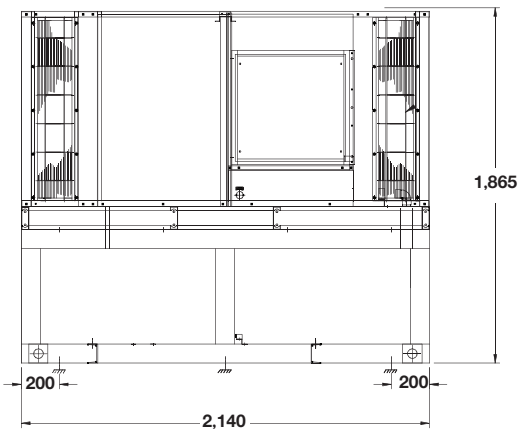

MODEL : TACU-CHB-040

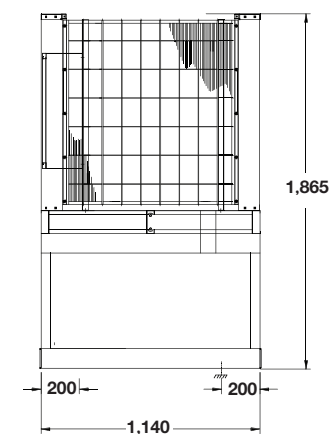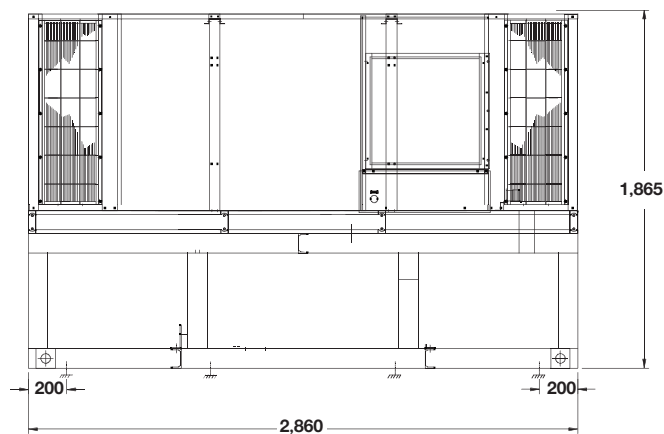

Unit : mm.(Millimeter)

SPECIFICATIONS

STANDARD ACCESSORIES

UNIT CASING

- Constructed of zinc-coated heavy-gauge, galvanized steel
- Powder-coated for protection against rust

COMPRESSOR

- Semi Hermetic compressor
- All compressor are mounted on vibration isolation

REFRIGERANT

- R-22

HEAT EXCHANGER

- Seamless copper tubes, mechanically expanded into aluminium fins with full height collars
- Leak tested at 350 PSIG from factory
- Dynamically and statically balanced, direct-drive fan
- Shell and Tube evaporator

REFRIGERATION PARTS

- Service Valves for Liquid line and Suction line
- Thermostatic expansion valves
- Sight Glasses
- Filter Driers

ELECTRICAL PARTS

- Magnetic & Overload contactor for fan motor and compressor
- High-Low pressure switches
- Digital temperature control
- Timer Delay Relay Devices

PHYSICAL DATA

SPECIFICATION MODEL : TACU-CHB (SCROLL)

MODEL	TACU-CHB	020	025	030	040		
NOMINAL CAPACITY**	MBH.	190	247	273	360		
POWER CONSUMPTION	(kW)	17.89	23.99	26.78	37.23		
COMPRESSOR	Type	Semi Hermetic					
	HP Qty./Unit	20	25	30	40		
CONDENSER COIL	Type	Aluminium Louver Fin with Inner Groove Copper Tube					
	Face Area (ft2)	46.66		56.66			
	Rows / FPI Tube Size (Inch)	2/16		3/14			
CONDENSER FAN & MOTOR	Type	3/8					
	Type	Propeller Fan : Vertical Discharge : Direct Drive					
	Quantity	2		3			
	Power (HP.)	3/4		1			
	RPM	900					
Air Quantity (CFM)	14,000		20,000		30,000		
REFRIGERANT	Type	R-22					
	Charge	Holding Charge: Nitrogen					
WATER CHILLER	Type	Shell and Tube Heat Exchanger					
	Chilled Water Flow Rate (GPM)	38		49.4		54.6	72
	Chilled Water Temp. IN/OUT (°F)	55/45					
	Chilled Water Pressure Drop (Ft. WG)	2.49		7.93		11.64	8.18
	Water Connection IN/OUT (Inch)	2		2-1/2		3	
DIMENSION	Length (mm.)	2,140			2,860		
	Width (mm.)	1,140					
	Height (mm.)	1,865					
WEIGHT (Aprox)	(kgs.)	740	842	921	995		

Note

MBH = 1000 BTUH

FOR SI. UNIT, COOLING CAPACITY (KW) = (MBH x 1000) / 3412

**Nominal Capacity Based on 45 °F Suction Temp. And 95 °F Ambient Temp.

ELECTRICAL DATA

MODEL	TACU-CHB	020	025	030	040
COMPRESSOR (Each)	Quantity	1			
	Volt / Phase / Hz	380/3/50			
	Power Input (Watt)	16,630	22,070	24,860	34,350
	FLA. (Amp.)	34.00	46.10	52.00	73.60
	LRA. (Amp.)	345	446	506	690
FAN MOTOR (Each)	Quantity	2			3
	Volt / Phase / Hz	380/3/50			
	Power Input (Watt)	632	960		
	FLA. (Amp.)	1.20	3.6		

Note

FLA = Full Load Amp.

LRA = Locked Rotor Amp.

Specification are subjected to change without notice for future improvement.

**EUROVENT CERTIFIED FOR MODEL DAHH ONLY.



UNIAIRE CORPORATION CO., LTD.

69 Moo 3 Kingkeaw Rd., Rachatewa District, Bangplee, Samutprakarn 10540 Thailand

Tel : +662-312-4500, Website : www.uni-aire.com

Export Sale : export@uni-aire.com

Domestic Sale : localsale@uni-aire.com

