


MODEL TACU - CHB *INVERTER*

PACKAGED AIR COOLED SCROLL CHILLER

16.7 - 25.4 TR

58.61 - 89.3 kw

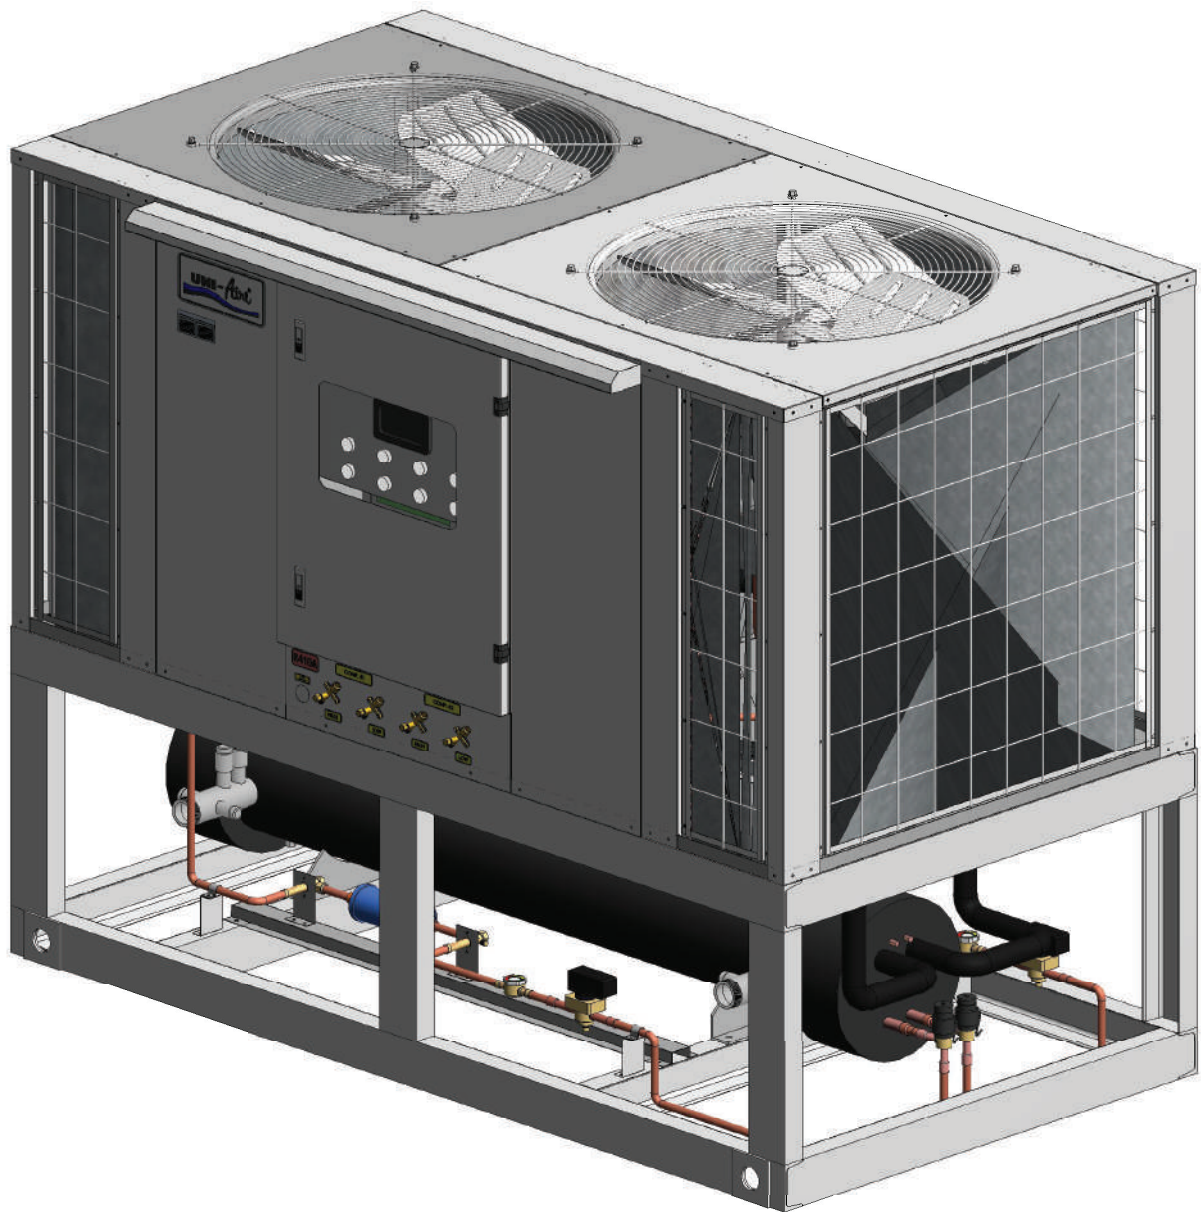

Air Conditioning Experts

Touch screen Display (Standard)

A wide 4.3" touch screen color display was designed to make controllers' user interface even easier, more complete and intuitive.



Scroll "Inverter" Compressor



- Precision temperature control : unnoticeable swing in temperature because of its adaptation of capacity to match with any variable conditions automatically.
- High efficiency : deliver only the energy needed to satisfy the cooling condition, thereby save energy.

R-410a Refrigerant



- Environmental friendly to ozone layer
- Non Flammable & safe to use

Fan & Motor



Aluminium Fan

Durable and provides large air volume

Evaporator (Shell and tube heat exchanger)

- High efficiency performance , low water pressure drop
- Aluminium star rods fitted in copper tubing , create turbulence refrigerant flow and cause higher heat transfer efficiency.
- Removable head and proper selection of head pass avoids excessive refrigerant pressure drops.
- High column strength tube design reduces the hazard of freeze-up.
- Thick insulation to prevent condensation.



Condenser Type : Plate Fin Coil




• Inner groove copper tube

Help improve energy efficiency and reduce size of the condenser coil.

• Aluminium louver fin

Louvered fins increase the heat-transfer capacity by creating air turbulence which reduces the boundary layer on the fin's surface

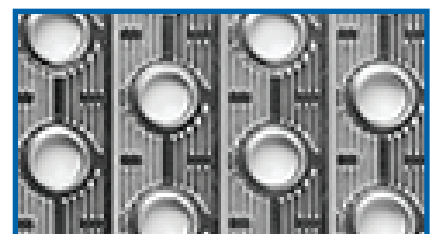

Refrigeration parts



Solenoid valve

Use electric power to control valve opening and closing.



Electronic expansion valve

The system is responsive and accurate with automatic valve opening and closing.



Filter drier

Filters out dirt and absorbs moisture. If the machine does not work properly or has acid build-up, the filter drier will also absorb the acid by the filter drier's inner filling.



Sight glass

Characterize the state and humidity of the refrigerant.




Packed Valve

Service Valves for liquid line and suction line

Electical parts

- Magnetic & Overload contactor for fan motor and compressor
- Unit main breaker
- Hi-low Pressure transducer
- Freezestat

Dimensional drawings


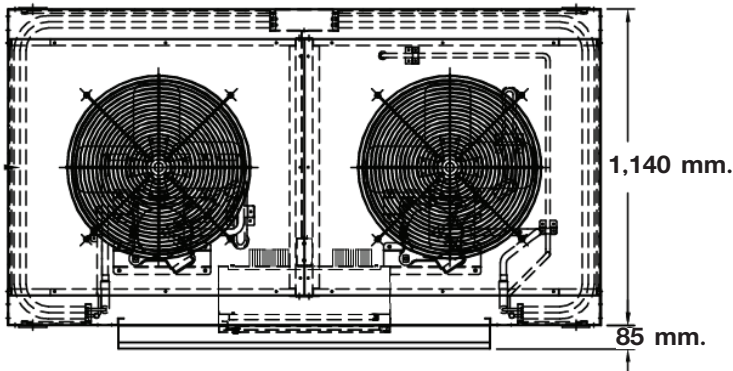


Model : TACU-CHB (Inverter)

020 A

025 A

030 A

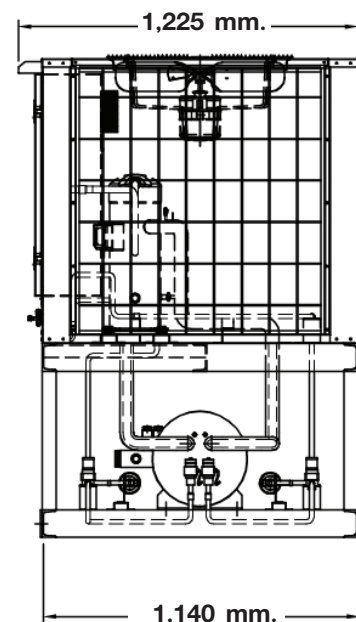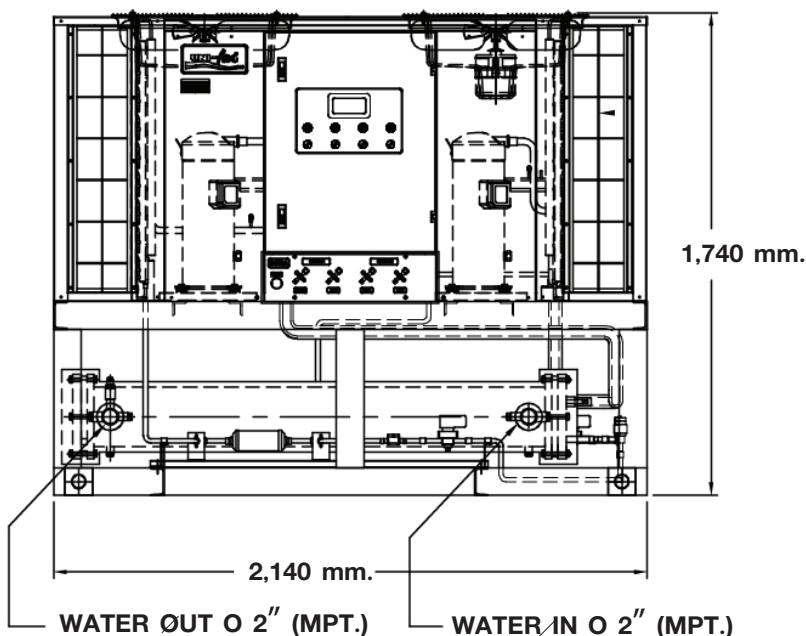

PHYSICAL DATA

SPECIFICATION MODEL : TACU-CHB					
Model		TACU-CHB	020A	025A	030A
Nominal Cooling capacity		MBH	200	259	305
Power Consumption		kW	19.00	24.60	28.60
Nominal COP		kW/kW	3.09	3.09	3.13
IPLV.IP		kW/kW	4.49	4.29	4.41
Minimum Capacity		BTUH	25%		
Compressor		Type	Scroll (Inverter)		
		No. Of Circuits	2		
		Qty./Unit	2		
Condenser Coil		Type/Material	Aluminium Louver Fin with Inner Groove Copper Tube		
Condenser Fan& Motor	Fan	Type	Propeller Fan		
		Diameter (in)	24	30	
	Motor	RPM	900		
		Air Quantity	14,000	20,000	
		Qty./Unit	2		
		Refrigerant		Type	R-410a
Charge	Holding Charge : R-410a				
Water Chiller	Chiller Water Flow Rate	GPM	37.8	45.2	55.6
	Chiller Water Temp. In/Out	°F	55/45		
	Chiller Water Pressure Drop	Ft.WG	2.49	7.93	11.64
	Water Connection In/Out	in	2		2-1/2
Dimension	Length	mm.	2,140		
	Width	mm.	1,225		
	Height	mm.	1,740		
Weight Operation		Kgs.	670	755	840

*Nominal Cooling Capacity Based on 38° F Sution Temp. and 95°F Ambient Temp

Fouling Factor 0.0005 Ft².h.F/Btu in Chiller

**IPLV calculations according to standard performances (in accordance with AHRI 550-590)

For SI.Unit, Cooling Capacity (kW) $\frac{\text{MBH} \times 1000}{3412}$

MBH = 1,000 Btu/h

3412

ELECTRICAL DATA

Model	TACU-CHB	020A	025A	030A
Compressor (Each)	Qty./Unit	2		
	V/Ph/Hz	380/3/50		
	Power Input (Watt)	9,128.00	11,557.00	13,555.00
	FLA.(Amp.)	15.2	18.2	22.1
Fan Motor (Each)	Qty./Unit	2		
	V/Ph/Hz	380/3/50		
	Power Input (Watt)	632	960	
	FLA.(Amp.)	1.2	2.3	

Note

FLA. =Full load Amp.

**Eurovent certified for model DAHH only.



UNIAIRE CORPORATION CO., LTD.

69 Moo 3 Kingkeaw Rd., Rachatewa District, Bangplee, Samutprakarn 10540 Thailand

Email.localsale@uni-aire.com | Email.export@uni-aire.com

Tel. +662-312-4500, www.uni-aire.com

@uni-aire Uni-Aire Whatsapp. +666-2312-3069

