



DECOR SERIES - CASSETTE TYPE


Air Conditioner MODEL : CSV-F2 / AFV

Cassette type distributed airflow all directions, including 4 colors can be matched with your styles.

Decor Series




Designed for Easy Cleaning and Maintenance

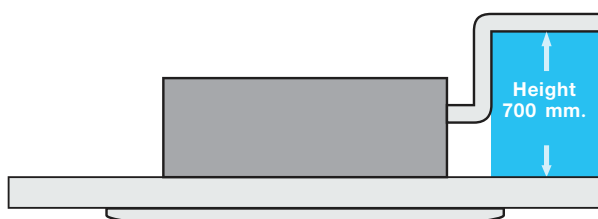

Built-in high head drain pump

Standard built-in drain pumps with head height up to 700 mm, creating a ideal solution for water drainage.

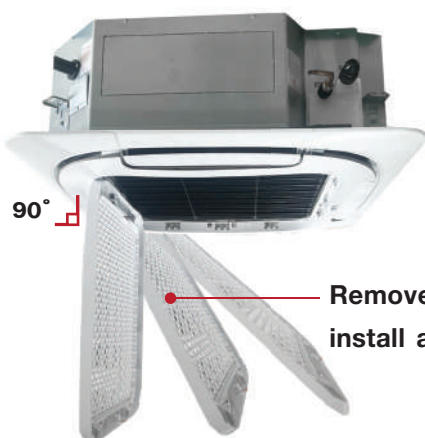


Push-open grill & easy cleaning of filter

The air intake grill can be easily disassembled by just push-open action, and can be still attached to the unit by 90 degree rotate angle, designed for easy maintenance and filter cleaning.



New model design


The newly designed cassette type, featured with round flow air-out directions, deliver you more comfortable feeling of air

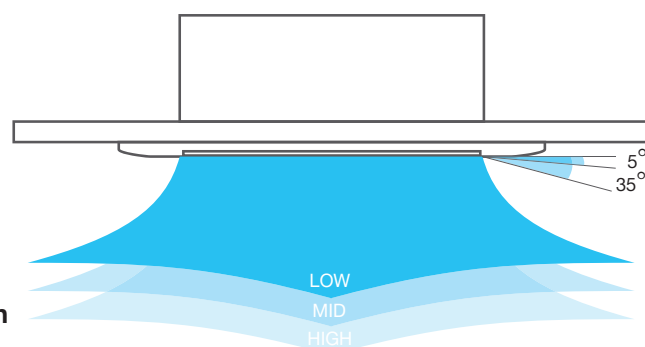


Different swing angle design

Differential swing angles to ensure comfortable feeling in anytime and anywhere.

Durable and Easy-to-Clean Technology

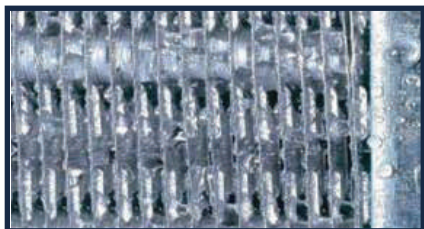

Normal aluminium fins collect dust between fin gaps, suitable for mold to grow, difficult to clean, prone to corrosion, high maintenance cost

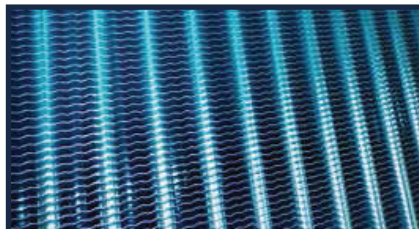

Hydrophilic Coil Blue fin coated evaporator coil provides hydrophobic property for bad odor and mold reducing. Energy saving and last longer than normal fins.

Thermostat: Wireless Digital Thermostat



ECO saves energy and helps reduce electricity costs




MODE 3 operating modes : Cool-Dry-Fan for exible comfort



FAN 3 fan speed levels: High-Medium-Low Quick and easy airow control for instant cooling comfort



SLEEP Auto temperature adjustment for better sleep and energy savings all night

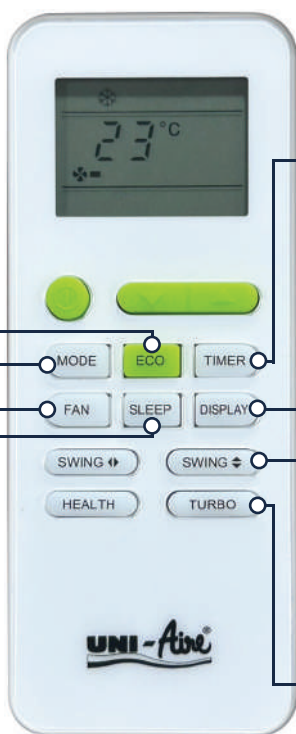

TIMER 24-hour timer for pre-set ON/OFF scheduling Smart usage control for convenience and energy efficiency



DISPLAY Control the device display without disturbing sleep



SWING Automatic air vane control



TURBO high-power fan motor Fast cooling with long-range airow

Optional

Anti-Corrosion Condensing Unit

Fiberglass casing condensing unit

Rust-Free. Durable in seaside area and highly acidic factory environment.

Casing made from **FIBERGLASS**

STAINLESS STEEL screws, nuts and fan guard

PLASTIC FAN BLADE



GREEN GUARD coated on Condenser coils

Corrosion prevention caused by ocean vapor and chemicals which extends coil life span.



Industrial area



Seaside area


Corrosion on metal sheet casing condensing unit with regular aluminum fin




Case damaged by rust



Rusty propeller



Corrosive fin



Rusty bolt and screw

Condensing Unit Model : AFV

Casing made from high - quality metal sheet, coated with anti - oxidation white powder coated. Durable with great heat transferred performance from advanced aerodynamic fan design. Compact size, easy installation in small space.



**With International standard quality
guaranteed by customers over 70 countries**

SPECIFICATION MODEL : CSV-F2 / AFV										
Nominal Cooling Capacity (BTU/Hr)		18,300	25,000	31,000	36,300	40,100	31,000	36,300	40,100	48,000
SEER (BTU/Hr / Watt)		13.36	13.30	12.80	12.63	13.06	13.00	12.69	11.48	11.48
COP (Watt / Watt)		3.68	3.67	3.53	3.48	3.61	3.59	3.50	3.62	3.16
Power Consumption (Watt)		1,458	2,000	2,572	3,057	3,250	2,520	3,026	3,261	4,389
Rated Operation Current (Amp.)		6.82	9.24	11.83	14.24	14.99	4.73	5.37	5.88	7.74
Power Supply (Volt/Phase/Hz)		220/1/50					380/3/50			
EGAT CERTIFIED No.5 (มาตรฐาน เบอร์ 5)										
TIS Standard (มาตรฐาน มอก. 2134-2553)										-
TIS Standard (มาตรฐาน มอก. 1529-2561)										
Fan Coil Unit	Model	CSV-18F2	CSV-25F2	CSV-30F2	CSV-36F2	CSV-40F2	CSV-30F2	CSV-36F2	CSV-40F2	CSV-50F2
	Type	4-Way Cassette Type								
Rated Air Flow at High Speed (CFM)		600	800	1,000	1,200	1,400	1,000	1,200	1,400	1,600
Fan Type		Multi Blade Centrifugal Type								
Evaporator Coil Type		Aluminium Louver Fin (Hydrophilic Coated) with Inner Grooved Copper Tube								
Expansion Device Type		Capillary Tube								
Control Type		Wireless Remote Control								
Air Filter Type		Washable PP. Net								
Drain Connection (mm.)(OD)		32								
Body Dimension (W x L x H) (mm.)		840 x 840 x 245			840 x 840 x 290					
Body Weight (kgs.)		26		28	30		28	30		33
Panel Dimension (W x L x H) (mm.)		950 x 950 x 45								
Panel Weight (kgs.)		6								
Sound Pressure Level (H/M/L) (dB(A))		45/43/41		47/44/43	49/45/44		47/44/43	49/45/44		52/48/45
Condensing Unit	Model	AFV-18FBS	AFV-25FL	AFV-301FBS	AFV-361FBS	AFV-401FBS	AFV-303FBS	AFV-363FBS	AFV-403FBS	AFV-503FXS
	Type	Horizontal Air Flow								
Fan Type		Propeller Fan								
Condenser Coil Type		Aluminium Louver Fin with Inner Grooved Copper Tube								
Compressor Type		Rotary								Scroll
Refrigerant Type		R-32 (Fully Charge)								
Pipe Connection	Suction Line (Inch)(OD)	5/8			3/4					
	Liquid Line (Inch)(OD)	3/8				1/2		3/8		1/2
Dimension (W x D x H) (mm.)		804x330x530	944x380x784		944x380x936	944x380x1,140	944x380x784	944x380x936	944x380x1,140	
Weight (kgs.)		52	61	66	72	89	66	71	88	116
Sound Pressure Level (dB(A))		56	58	62	62	61	62	62	61	65

Cooling capacity based on 27 °C DB. 19 °C WB air on evaporator coil and 35 °C DB air on condenser. Specifications are subjected to change without notice for future improvement.



UNIAIRE CORPORATION CO., LTD.

69 Moo 3 Kingkeaw Rd., Rachatewa District,

Bangplee, Samutprakarn 10540 Thailand

Tel : +662-312-4500, Website : www.uni-aire.com

Export Sale : export@uni-aire.com

Domestic Sale : localsale@uni-aire.com

